

# 1600 Series® Electric Strike

*Works with all brands of  
cylindrical and mortise locksets,  
with or without a deadbolt*

Also available in  
Complete One Box  
Solution



Accommodates up to a 1" deadbolt with enhanced vertical cavity spacing.

The HES 1600® Series Electric Strikes set a new standard in the industry by offering dynamic integrated adjustability and field configurable options compatible with any cylindrical or mortise lock. The modular design of the platform makes stocking and installing easier with interchangeable faceplates and accessories. For the first time, the aesthetics of an electric strike are complimentary to other surrounding door hardware and blend in with the opening due to the fully finished design available in eight finishes.

## Features

- Stainless steel construction
- Tamper resistant
- Static strength 1500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1,000,000 cycles
- Field selectable fail safe/fail secure
- Non-handed
- Interchangeable faceplates and accessories
- Field replaceable components
- Fully finished faceplate, keeper, case and trim
- Field adjustable integrated shim
- Electrolynx® connectors
- Strike body depth 1-5/8" [41.3mm]
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

## Options

- LM - Lock monitor
- DLM - Dual lock monitors
- LMS - Lock monitor and strike monitor
- DLMS - Dual lock monitors and strike monitor

## Accessories

- 157 Torx® screws
- HES-CUT-MTK Metal Template Kit
- OPT-1SRK Spring Replacement kit
- OPT-1LM Single lock monitor
- OPT-1DLM Dual lock monitors
- MOD-1SOL Solenoid Replacement Module



Grade 1



SecuriCare  
Warranty



Mortise Locks  
with Deadbolt



Mortise Locks  
without  
Deadbolt



Cylindrical  
Locksets



Field Selectable  
(Fail secure  
/Fail safe)



Dual Voltage  
12/24



PoE  
Friendly



Fire Rated



Windstorm  
Rated



Outdoor  
Rated



Burglary  
Rated



ASSA ABLOY

## 1600 Series® Electric Strike

### Certifications

- ASTM E152 Fire Door Compliant
- ASTM E330 Certified
- ANSI/BHMA A156.31, Grade 1
- ANSI/SDI 250.13 Certified
- CAL FIRE, 3776-1654:0500
- Florida Building Code Approved FL# 22400
- NFPA-252 Fire Door Compliant
- RoHS Compliant
- UL 10C Fire Rated
- UL 294 Listed
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

### Specifications


#### Frame Application

- Metal
- Wood

#### Electrical

- Dual voltage 12/24 VDC/VAC
- 240 mA at 12 VDC/VAC
- 120 mA at 24 VDC/VAC
- DC continuous duty/AC intermittent duty only
- PoE friendly

### Dimensions

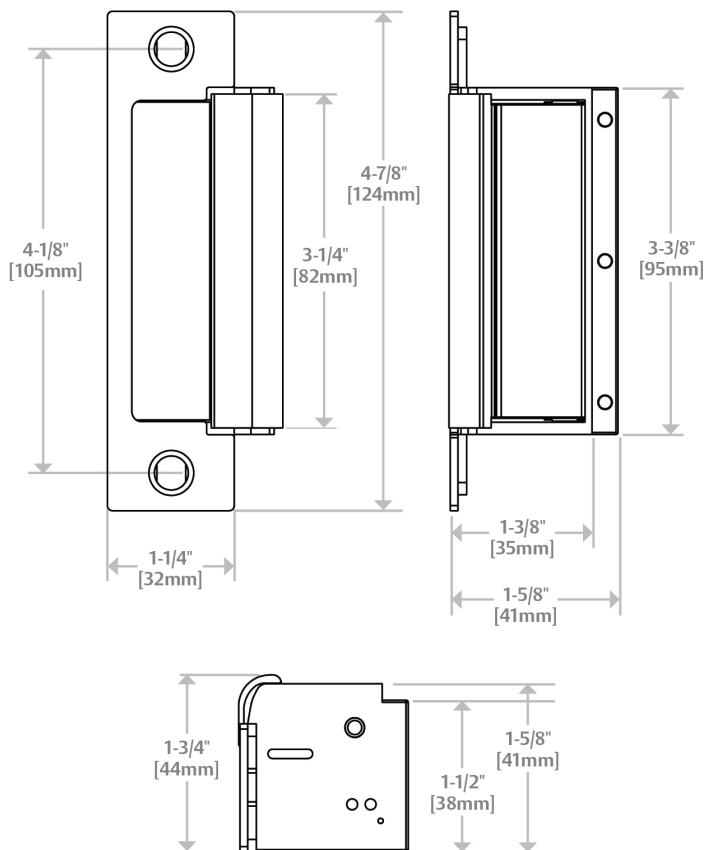

## How to Order

SERIES	MODEL	FINISH*	OPTION (S)*
1600	- CS	- 630	- LM
1600 Universal Electric Strike	(blank) Electric strike body only	605 Bright Brass, clear coated	(blank) No Monitor
	CS Includes 1LB faceplate kit for Latchbolts and 1DB faceplate kit for Deadbolts	606 Satin Brass, clear coated	LM Lock Monitor
		612 Satin Bronze, clear coated	DLM Dual Lock Monitor
		613E Dark Oxidized Satin Bronze- equivalent	LMS Lock Monitor and Strike Monitor
	CLB Includes 1DB faceplate kit for Deadbolts	629 Bright Stainless Steel	
		630 Satin Stainless Steel	DLMS Dual Lock Monitors and Strike Monitor
	CDB Includes 1LB faceplate kit for Latchbolts	BSP Black Suede Powder coat	

\* LMS/DLMS factory installed only option

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.