


Folger Adam SB:310-1(X) Electric Strike Body Only

Works with cylindrical and mortise locksets with 1/2", 5/8" or 3/4" throw latchbolts

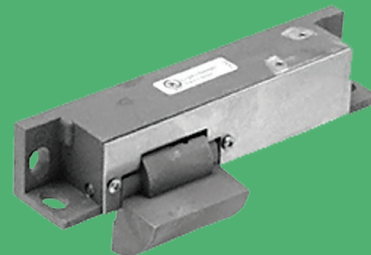

The industrial grade electric strike designed for extreme heavy duty applications.

The SB:310-1(X) Series is a 3 hour fire-rated, industrial grade electric strike designed for extreme heavy duty applications. The all stainless steel construction of this device makes it ideal for high abuse applications that would disable other electric strikes.

Features

- Tamper-resistant, heavy duty construction
- Constructed entirely of stainless steel for strength and corrosion resistance
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance rating 1,000,000 cycles
- Adjustable keeper allows for door and frame alignment
- 1/2", 3/4" and 1" keeper depths
- Non-handed
- Fail secure (standard)
- Plug-in connector
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

Options

- Fail Safe
- LCBMA: Latchbolt & Locking Cam Monitor with Auxiliary Switch

Accessories

- **310-2-3** Astragal Strike Latch Guard
- **152** Universal Mounting Tabs
- **2001-1** Wire-in Bridge Rectifier
- **2005M3** SMART Pac® III
- **2001M** Plug-in Bridge Rectifier
- **2004M** ElectroLynx® adapter
- **2006M** Plug-in Buzzer



Grade 1

SecuriCare
WarrantyCylindrical
LocksetsMortise Locks
without
DeadboltRim Exit
DevicesSpecialty
Locksets

Fire Rated

Burglary
Rated

ASSA ABLOY

Folger Adam SB:310-1(X) Electric Strike Body

Certifications

- ANSI/BHMA A156.31, Grade 1
- RoHS Compliant
- UL 10C Fire Rated
- UL 294 Listed
- UL 1034 Burglary-Resistant Listed

Specifications

Electrical

- 510 mA at 12 VDC continuous duty
- 250 mA at 24 VDC continuous duty

Dimensions

310-1(1/2)

For use with up to 5/8" throw latchbolts (without deadbolt)
1/2" keeper standard

310-1(3/4)

For use with 3/4" [19mm] throw latchbolts (without deadbolt) on single and double glass door applications with the addition of a third party faceplate.

- Works with Rockwood PDU8000 and CR Laurence PA100 Series panic devices when used with ESK Series stop/strike

3/4" [19mm] keeper standard

310-1(1)

For use with both a 3/4" [19mm] throw latchbolt and a 1" [25.4mm] throw deadbolt
1" [25.4mm] keeper standard

310-1(PK)

For up to 3/4" [19mm] Pullman style latchbolts
PK keeper standard

310-1(SK)

For Squarebolt® style rim exit devices

- Works with Corbin Russwin® ED4200S, ED5200S and ED5200SA Securebolt® or ASSA ABLOY ACCENTRA™* 7150(F), 7250, 7270M(F) Squarebolt® Exit Devices.

SK keeper standard

* Formerly Yale Commercial

How to Order

PREFIX	SERIES	KEEPER STYLE	FAIL SECURE / SAFE	VOLTAGE	OPTION (S)
SB	-310-1	(3/4)	- F	- 24D	- LCBMA
SB Strike Body	310-1 Strike Body Only	(1/2) 1/2" keeper	(blank) Fail Secure (standard)	12D 12 Volt	(blank) No Monitor
		(3/4) 3/4" keeper		24D 24 Volt	LCBMA Latchbolt & locking cam monitor with auxiliary switch
		(1) 1" keeper	F Fail Safe		
		(PK) For use with 3/4" Pullman style latchbolts			
		(SK) For use with Squarebolt® style rim exit devices			

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.