


Electric Strike Overview

Electric Strikes for every
type of lockset application



Works with Cylindrical & Mortise Locksets with or without a 1" Deadbolt

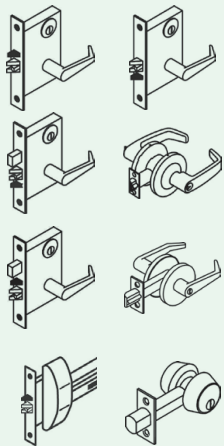


Compatible
with all
manufacturers

ES100-16S

Aperio® wireless technology offers flexible configuration options and dynamic adjustability without the need to run wires.


240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only

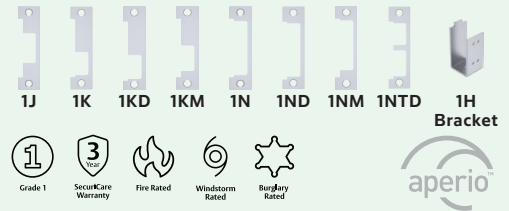

1600CS

Dynamic, low profile design with integrated adjustability and field configurable options.


240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only

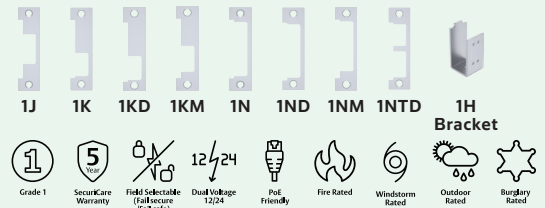

1006CS

Strongest design with SMART Pac® III in-line power controller.

450 mA at 12 VDC | 250 mA at 24 VDC

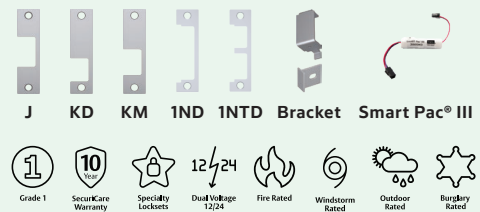

Works with Cylindrical & Mortise Locksets for an ANSI 4-7/8" Strike Plate with a 1" Deadbolt




Compatible
with all
manufacturers

ES100-16D

Aperio® wireless technology offers flexible configuration options and dynamic adjustability without the need to run wires.


240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only

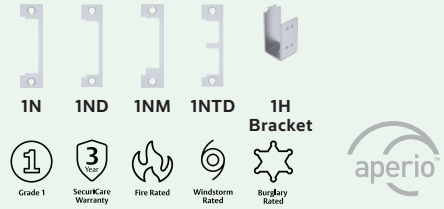

1600CDB

Dynamic, low profile design with integrated adjustability and field configurable options for deadbolt applications.


240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only

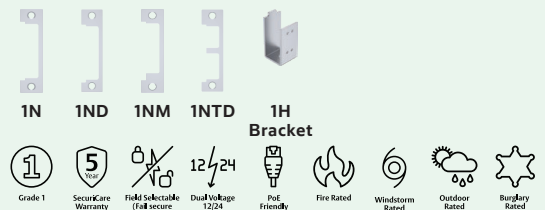

1006CDB

Strongest design for deadbolt applications.


450 mA at 12 VDC | 250 mA at 24 VDC

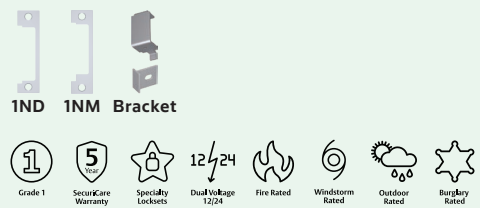

1006CAS

Strongest design for deadbolt recapture applications.

450 mA at 12 VDC | 250 mA at 24 VDC


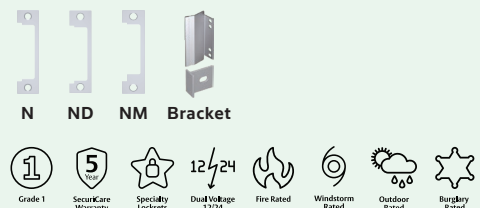


Works with Cylindrical & Mortise Locksets for an ANSI 4-7/8" Strike Plate with a 3/4" Latchbolt

ES100-16L

Aperio® wireless technology offers flexible configuration options and dynamic adjustability without the need to run wires.

240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only




Compatible
with all
manufacturers

1600CLB

Dynamic, low profile design with integrated adjustability and field configurable options for latchbolt applications.




240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



1006CLB

Strongest design for latchbolt applications.

450 mA at 12 VDC | 250 mA at 24 VDC
DC continuous duty | AC intermittent duty only




Compatible
with all
manufacturers

ES100-15L

Aperio® wireless technology offers flexible configuration options and dynamic adjustability without the need to run wires.


240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



1500C

Heavy duty low profile design for latchbolt applications.

240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only





Compatible
with all manufacturers

4500C

Low profile design for installation in 2" UL 10C fire-rated frames with 1/2" drywall penetration.

240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



See installation instructions
for Schlage and
ASSA ABLOY ACCENTRA™*



* Formerly Yale Commercial

Works with Cylindrical Locksets up to a 5/8" Throw Latchbolt

5000C | 5300C

Low profile, compact design for easy installation.

240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only





5300C only

7000C

Designed to address pre-loaded doors, and with in-frame horizontal adjustability.

450 mA at 12 VDC | 250 mA at 24 VDC


Also compatible with certain rim exit devices




8000C | 8300C

Concealed design for easy installation with no cutting on the frame required and with vertical alignment adjustability.

240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



8300C only



Compatible with all manufacturers

Folger Adam 310-2

3 hour fire-rated industrial grade electric strike designed for extreme heavy duty applications.

510 mA at 12 VDC | 250 mA at 24 VDC



Folger Adam 712

For use with 1/2" to 5/8" latchbolts on hollow metal frame applications.

290 mA at 12 VDC | 150 mA at 24 VDC
Also available as a 3/4" latchbolt variant



Folger Adam 732

For use with 1/2" to 5/8" throw latchbolts on wood frame applications.

290 mA at 12 VDC | 150 mA at 24 VDC
Also available as a 3/4" latchbolt variant




Works with Tubular Exit Devices

9100

Low-profile, retro-mounted electric strike designed to work with tubular, vertical rod exit devices on single glass doors.


240 mA at 12 VDC | 120 mA at 24 VDC
DC continuous duty | AC intermittent duty only




9200

Low-profile, retro-mounted electric strike designed to work with tubular, vertical rod exit devices on double glass doors.

480 mA at 12 VDC | 240 mA at 24 VDC
DC continuous duty | AC intermittent duty only



Works with Rim Exit Devices up to 1/2" Throw Latchbolt




Compatible with most manufacturers

9400

Slim-line surface mounted design for easy installation.

450 mA at 12 VDC | 250 mA at 24 VDC




Works with Rim Exit Devices up to 3/4" Pullman Latchbolt

7000

Designed to address pre-load doors, and with in-frame horizontal adjustability.

The 7000 works with Rim Exit Devices only when paired with 783S, 786S, 789S Faceplates.

450 mA at 12 VDC | 250 mA at 24 VDC




Shown with 789S faceplate

9500

Fire-rated surface mounted design for easy installation.


450 mA at 12 VDC | 250 mA at 24 VDC



9600

Windstorm resistant, surface mounted design for easy installation

450 mA at 12 VDC | 250 mA at 24 VDC




Folger Adam 310-4

Fire-rated surface industrial grade electric strike designed for extreme heavy duty applications.

510 mA at 12 VDC | 250 mA at 24 VDC



Works with Rim Exit Devices with SquareBolt




Corbin Russwin SecureBolt® and ASSA ABLOY ACCENTRA™** SquareBolt®

9700


Windstorm resistant and fire-rated, surface mounted design for SquareBolt applications.

450 mA at 12 VDC | 250 mA at 24 VDC



* Formerly Yale Commercial


Works with Rim Exit Devices with Adams Rite® Starwheel or Interlocking Latchbolt




9800

Outdoor-rated, surface mounted design for Adams Rite Starwheel and Interlocking Rim Exit Devices

450 mA at 12 VDC | 250 mA at 24 VDC




Works with Cylindrical & Mortise Locksets without a Deadbolt, 1/2", 5/8", 3/4" Throw Latchbolt



Folger Adam 742-75

Fire-rated industrial grade electric strike designed for heavy duty applications


290 mA at 12 VDC | 150 mA at 24 VDC




Folger Adam 310-1-(X)

3 hour fire rated, industrial grade, designed for extreme heavy duty applications

510 mA at 12 VDC | 250 mA at 24 VDC



Works with Cylindrical & Mortise Locksets without a Deadbolt 3/4" Throw Latchbolt




Folger Adam 310-2-3/4

Fire-rated industrial grade electric strike designed for heavy duty applications

510 mA at 12 VDC | 250 mA at 24 VDC



Works with Mortise Locksets without a Deadbolt up to 3/4" Throw Latchbolt



8500

Concealed design for easy installation with minimal modification to the frame

240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



< Shown with 852L Faceplate

Works with Cylindrical Locksets up to a 3/4" Throw Latchbolt




Compatible
with most
manufacturers

5200C

In-frame horizontal adjustable design



240 mA at 12 VDC/VAC | 120 mA at 24 VDC/VAC
DC continuous duty | AC intermittent duty only



7501

Designed for fire-rated applications
with pre-load conditions

450 mA at 12 VDC | 250 mA at 24 VDC



Finishes



BSP
Black
Suede
Powder



605
Bright
Brass



606
Satin
Brass



612
Satin
Bronze



613E
Dark Oxidized
Satin Bronze
Powder



629
Bright
Stainless
Steel



630
Satin
Stainless
Steel

Options & Accessories

LM, LBM Latchbolt Monitor

Detects when latchbolt is in a locked state.

LMS, LBSM Latchbolt Strike Monitor

Detects when latchbolt and strike are in a locked state.

2005M3 SMART Pac® III

Reduces initial voltage in timed or fail safe operations
by 25% to extend the life of the electric strike.

9000-MTK Metal Template Kit

For 9400, 9500, 9600, 9700, 9800.

HESCUT-MTK Metal Template Kit

For the ES100, 1006, 1500, 1600, 4500, 5000, 5200, 5300, 7000
and 7501 electric strikes 4-7/8" ANSI jamb preparation only.

2004M Electrolynx® Adapter

A wiring system of universal plug-in connectors and
standardized, color-coded wiring for easy installation.

Faceplate Options, Kits & Finishes


To meet various lock types and installation needs.



2005M3 SMART Pac® III



**9000-MTK Metal
Template Kit**



**HESCUT-MTK
Metal Template Kit**



**2004M
Electrolynx®
Adapter**



USA

800 626 7590 | F. 866 582 4641 | hesinnovations.com
customerservice.hes@assaabloy.com | techsupport.hes@assaabloy.com | orders.hes@assaabloy.com

CANADA

800 461 3007 | assaabloydss.ca | sales.dss.ca@assaabloy.com | orders.dss.ca@assaabloy.com

Printed in the U.S.A. Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2026, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. HES-094-0226

Experience a safer
and more open world

