

5300 Series Electric Strike



Experience a safer
and more open world

The compact, high performance electric strike designed for fire-rated openings with cylindrical locksets where there is limited space behind the jamb.

Low Profile


- Compact, high-performance design
- Ideal for applications where there is limited space behind the jamb
- Strike body depth 1-1/16"

Versatile Design

- Dual voltage 12/24 VDC/VAC
- Field selectable fail safe/ fail secure
- Unique keeper pin locking design
- Plug-in connector and trim enhancer included

Tested for Durability

- ANSI/BHMA A156.31, Grade 1
- Static strength 1,500 lbs, Dynamic strength 70 ft-lbs
- Designed with the strength and durability to meet UL outdoor rating requirements
- UL 10C fire rated, 3-hour single door (fail secure only)

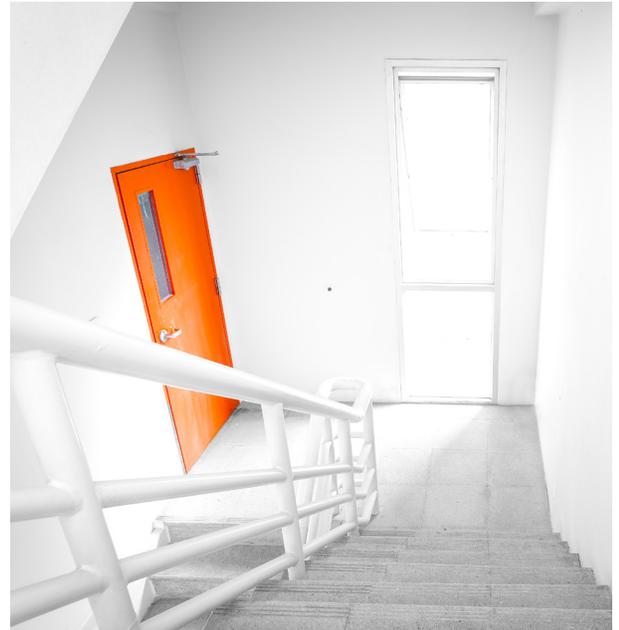

Grade 1



SecuriCare
Warranty



Cylindrical
Locksets



Field Selectable
(Fail secure
/Fail safe)



Dual Voltage
12/24



PoE
Friendly



Outdoor
Rated



Burglary
Rated



Fire Rated

Features

- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Field selectable fail secure/ fail safe
- Non-handed
- Internally mounted solenoid
- Accommodates 1/2" - 5/8" latchbolt (5/8" with 1/8" door gap)
- Strike body depth 1-1/16"
- Plug-in connector
- Trim enhancer included
- Dual voltage 12 or 24 VDC/VAC

Certifications

- ANSI/BHMA A156.31, Grade 1
- CAL FIRE, 3776-1654:0502
- NFPA-252 fire door Compliant
- RoHS Compliant
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use
- UL 10C Fire-Rated, 3 Hour Single Door [Fail Secure Only]
- UL 294 Listed
- CAN/ULC-S104 Fire Door Compliant

Specifications

Frame Application

- Metal
- Wood

Electrical

- 240 mA at 12 VDC/VAC
- 120 mA at 24 VDC/VAC
- DC continuous duty/AC intermittent duty only

Options

- LBM - Latchbolt monitor

Accessories

- 150 Strike Latch Guard
- HESCUT-MTK Metal Template Kit
- 2005M3 SMART Pac® III
- 2001M Plug-in Bridge Rectifier
- 2004M ElectroLynx® adapter
- 2006M Plug-in Buzzer
- 5104-1 Stackable Lip Extension
- 5104-1-1/4 Stackable Lip Extension
- 5104-1/2 Stackable Lip Extension

Dimensions

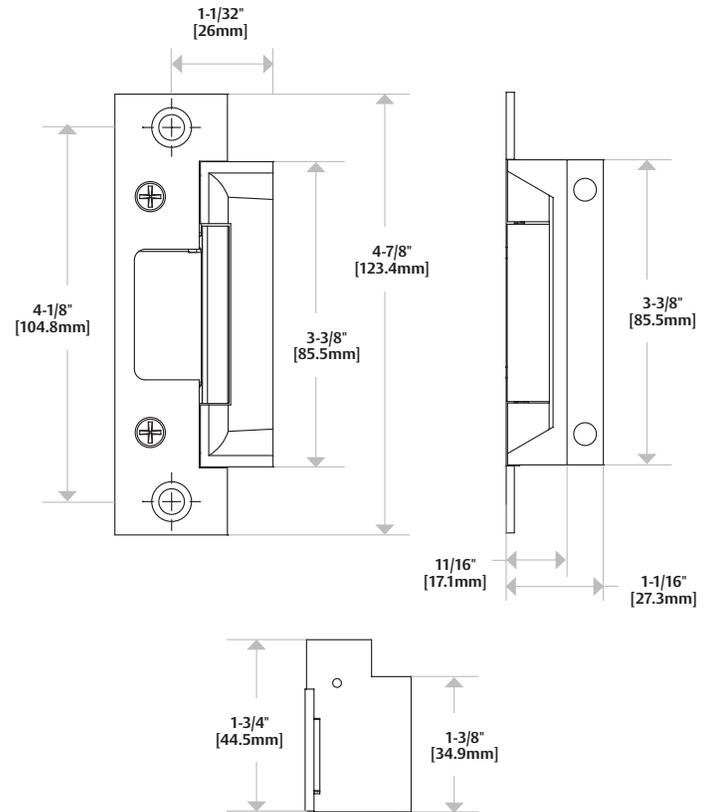


Diagram shown with 501 Option

How to Order

Specify quantity and the following information. Order related products separately

SERIES	MODEL	FINISH	OPTION (S)
5300	—	— 630	— LBM
5300 Universal Electric Strike; Faceplates ordered separately	C* Complete Electric Strike; includes the 501 and 501A faceplates	630 Satin Stainless Steel	LBM Latchbolt Monitor LBSM Latchbolt Strike Monitor

*Complete Pacs are only available in the 630 finish

FACEPLATE OPTIONS	FINISH
502	— 613E
For Cylindrical Locksets (ANSI Metal)	605 Bright Brass
501 Option 4-7/8" x 1-1/4"	606 Satin Brass
For Cylindrical Locksets (Aluminum)	612 Satin Bronze
501A Option 4-7/8" x 1-1/4"	613E Dark Oxidized Satin Brass
502 Option 7-15/16" x 1-7/16"	629 Bright Stainless Steel
503 Option 6-7/8" x 1-1/4"	630 Satin Stainless Steel
For Cylindrical Locksets (Wood)	BSP Black Suede Powder
504 Option 10" x 1-3/8"	



800 626 7590 | hesinnovations.com
10027 S. 51st Street, Ste. 102
Phoenix, AZ 85044 USA

Printed in the U.S.A. Patent pending and/or patent www.assaabloydss.com/patents
Copyright © 2023, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. HES-116-0323