

# 9500 Series Surface Mounted Electric Strike

*Works with rim exit devices  
up to 3/4" throw latchbolt*



## The strong durable, fire-rated surface mounted solution.

The HES 9500 Series is a 3 hour fire-rated, surface mounted electric strike designed to accommodate rim exit devices with a 3/4" Pullman latch. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. Simply place the electric strike on the surface of the frame, align it with the exit latchbolt and install. Adjustments have never been easier as the base is now separate from the cover.

The 9500 exceeds Grade 1 standards for strength and performance. It is field selectable for fail secure and fail safe operation, and for 12 or 24 VDC. This unique electric strike complies with NFPA 80-07 guidelines for retrofit into fire-rated frames.

## Features

- Installs in metal or wood frames (wood screws not included)
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1,000,000 cycles
- Field selectable fail secure/fail safe
- Horizontal adjustability
- Non-handed
- Internally mounted solenoid
- Accommodates up to 3/4" Pullman latch
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

## Options

- LBM - Latchbolt monitor
- LBSM - Latchbolt strike monitor

## Accessories

- **9000-1xx** Spacer Plate
- **SMB** Surface Mounting Box
- **9000-ASB** 1/2" Aluminum Spacer Bracket
- **2005M3** SMART Pac® III
- **2001M** Plug-in Bridge Rectifier
- **2004M** ElectroLynx® adapter
- **2006M** Plug-in Buzzer
- **9000-MTK** Metal Template Kit



Grade 1

SecuriCare  
WarrantyRim Exit  
DevicesField Selectable  
(Fail secure  
/Fail safe)Dual Voltage  
12/24

Fire Rated

Outdoor  
RatedBurglary  
Rated

ASSA ABLOY

## 9500 Series Surface Mounted Electric Strike

### Certifications

- ANSI/BHMA A156.31, Grade 1
- CAL FIRE, 3776-1654:0101
- NFPA 80-07 Compliant
- RoHS Compliant
- UL 10C Fire Rated
- UL 294 Listed
- UL 305 Listed
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

### Specifications


#### Frame Application

- Metal
- Wood

#### Electrical

- Dual voltage 12 or 24 VDC
- 500 mA at 12 VDC continuous duty
- 250 mA at 24 VDC continuous duty

### Dimensions

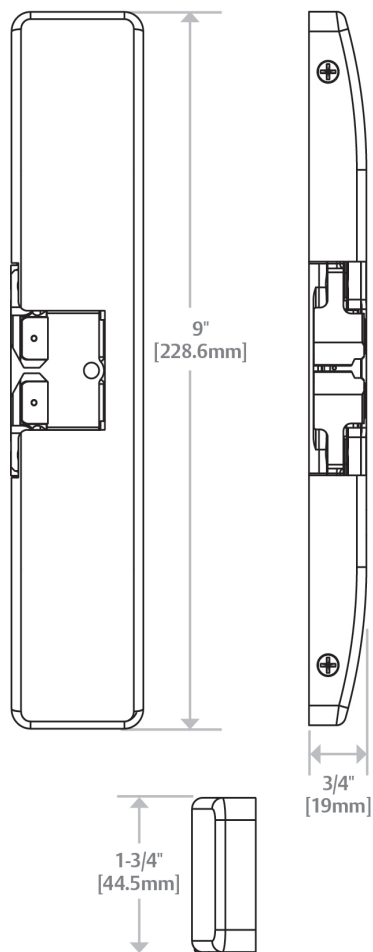

### How to Order

SERIES	FINISH	OPTION (S)
<b>9500</b>	<b>- 630</b>	<b>- LBM</b>
<b>9500</b> Surface-Mounted Electric Strike for 3/4" Pullman Rim Exit Devices, fire rated; no faceplates required	<b>605</b> Bright Brass <b>606</b> Satin Brass <b>612</b> Satin Bronze <b>613</b> Bronze Toned <b>613E</b> Dark Oxidized Satin Bronze Powder <b>629</b> Bright Stainless Steel <b>630</b> Satin Stainless Steel <b>BSP</b> Black Suede Powder	<b>LBM</b> Latchbolt Monitor <b>LBSM</b> Latchbolt Strike Monitor

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.