9700 Series Surface Mounted Electric Strike

Works with Corbin Russwin SecureBolt® and ASSA ABLOY ACCENTRA™ SquareBolt® exit devices



The stylish windstormrated and fire-rated, squarebolt solution.

The 9700 Series is a heavy duty, surface mounted electric strike designed to accommodate Corbin Russwin® Securebolt® and ASSA ABLOY ACCENTRA™ Squarebolt® exit devices. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. It is field selectable for fail secure and fail safe operation, and for 12 or 24 VDC.

The 9700 is designed with the strength and durability required to exceed the severe forces of ANSI Windstorm testing. This unique electric strike also complies with NFPA 80-07 guidelines for retrofit into fire rated frames.

Features

- Installs in metal or wood (wood screws not included)
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper resistant
- Static strength to 2,000 lbs
- Dynamic strength to 120 ft-lbs
- Endurance 1,000,000 cycles
- Field selectable fail safe/fail secure
- Horizontal adjustability
- Non-handed
- Internally mounted solenoid
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

Options

- LBM Latchbolt monitor
- LBSM Latchbolt strike monitor

ccessories

- 9000-1x Spacer Plate
- **SMB** Surface Mounting Box
- 9000-ASB 1/2 Aluminum Spacer Bracket
- 2005M3 SMART Pac® III
- 2001M Plug-in Bridge Rectifier
- 2004M ElectroLynx® adapter
- 2006M Plug-in Buzzer
- 9000-MTK Metal Template Kit

























Certifications

- ASTM E152 Fire Door Compliant
- ASTM E330 Certified
- ANSI/BHMA A156.31, Grade 1
- ANSI/SDI 250.13 Certified
- Florida Building Code Approved FL# 19224
- NFPA 80-07 Compliant
- NFPA-252 Fire Door Compliant
- RoHS Compliant
- UL 10C Fire Rated
- UL 294 Listed
- UL 305 Listed
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

Specifications


Frame Application

- Metal
- Wood

Electrical

- Dual voltage 12 or 24 VDC
- 500 mA at 12 VDC continuous duty
- 250 mA at 24 VDC continuous duty

Dimensions

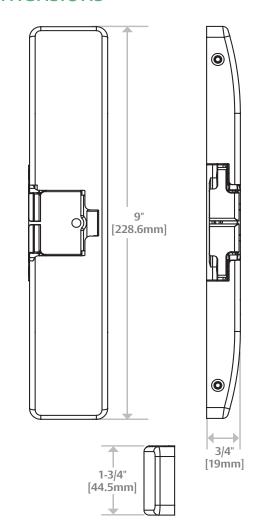

How to Order

| SERIES | FINISH | OPTION (S) |
|------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------------------|
| 9700 | - 630 | – LBM |
| 9700 Surface Mounted Electric Strike for Corbin Russwin® Securebolt® and ASSA ABLOY ACCENTRA™ Squarebolt® exit devices | 605 Bright Brass | LBM Latchbolt Monitor |
| | 606 Satin Brass | LBSM Latchbolt Strike Monitor |
| | 612 Satin Bronze | |
| | 613 Bronze Toned | |
| | 613E Dark Oxidized Satin Bronze Powder | |
| | 629 Bright Stainless Steel | |
| | 630 Satin Stainless Steel | |
| | BSP Black Suede Powder | |

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.